



The
Patent
Office

6500/0193

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



INVESTOR IN PEOPLE

The Patent Office
General House 2000
Cardiff Road
Newport PCT

South Wales

NP10 8QQ

REC'D 28 JUN 2000

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

P. Mahoney

Dated

20/4/00



Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

MS/P75377

2. Patent application number

(The Patent Office will assign a number if you do not)

9909317.1

23 APR 1999

3. Full name of the or of each applicant (underline all surnames)

Dymark Limited,
Challenge House,
52-54 Holton Road,
Barry, South Glamorgan,
CF63 4HE.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

7646623001

4. Title of the invention

Cutting Tool

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Urquhart-Dykes & Lord
Three Trinity Court,
21-27 Newport Road,
Cardiff CF2 1AA.

Patents ADP number (if you know it)

1644025

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -
Description 9
Claim(s) -
Abstract -
Drawing(s) 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *Urquhart-Dykes & Lord* Date 23-04-1999
Urquhart-Dykes & Lord

12. Name and daytime telephone number of person to contact in the United Kingdom Mark spittle
01222 487993

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforeband in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Cutting Tool

The present invention relates to a cutting tool.

The majority of existing cutting tools comprise an elongate handle and a blade portion having a cutting edge extending axially from the handle.

5 When using such a tool to perform a cutting operation, it is usual for a person to grip the handle of the tool and to draw the blade of the tool towards himself or sideways through a workpiece.

10 However, as the blade of the tool is released from the workpiece at the end of a cut, the person holding the tool often finds it difficult to maintain control of the tool, thus creating a serious safety hazard both to himself and to those around him.

15 An arrangement has been proposed wherein a tool is provided with a member which is biased towards a safety position in which the member forms a guard for the blade of the tool, but which may be displaced to expose the blade by bringing the tool into cutting contact with a workpiece. The tool is further provided with a latch which must be released
20 by depressing a trigger to allow the guard member to be displaced. Thus, inadvertent exposure of the tool is prevented.

25 However, in order to overcome the safety hazard described above, the trigger must be released before the end of a cut to allow the latch to re-engage the guard member as soon as the tool is released from a workpiece: we have found that there is a tendency for persons using such tools not to release the trigger in sufficient time to prevent accidental cuts from occurring.

30 We have now devised an arrangement which overcomes the above-mentioned limitations of existing cutting tools.

 According to a first aspect of the present invention, there is provided a cutting tool having a blade and a member which is biased towards a safety position in which the member forms a guard for the blade, but which may be displaced to
35 expose the blade by bringing the tool into cutting contact with a workpiece, and a locking mechanism having a trigger which

must be moved from a first position to a second position to release the guard member from its safety position and arranged such that each time the guard member is released from its safety position, is displaced through a predetermined distance, and then returns to its safety position, the guard member will become locked in place regardless of the position of the trigger.

Thus, as the blade of the tool is released from a workpiece at the end of a cut, the guard member is re-deployed and locked in place without the operator having to release the trigger.

Preferably the guard member is pivotally mounted to the tool.

Preferably the locking action of the cutting tool is provided by a strut which is pivotally joined to the guard member, the distal end of the strut being arranged to follow a loop. Most preferably the strut is arranged to pivot in a vertical plane.

Preferably a lug at the distal end of the strut slidably locates within a looped recess. Preferably the recess comprises a guide-channel which extends substantially perpendicularly to the axis of the longitudinal axis of the strut and within which the lug prevents substantial axial movement of the strut. Preferably as the trigger is displaced from said first position to said second position, the strut is displaced such that lug slides out of one end of the channel.

Preferably the locking mechanism is arranged such that the guard member cannot be released from said safety position unless the tool is in contact with the workpiece.

Preferably the blade is provided in a replaceable cartridge.

Cutting tools are also known in which a blade is mounted to a sliding blade-carriage for advancing and retracting the blade in predetermined increments. For example, it is known to form a blade with a number of lines of weakness defining successive blade sections which may be detached, one at a time, from the end of the blade to maintain a sharp edge to the blade. The blade-carriage may therefore be arranged to be advanced in increments equal to the width of each blade

segment.

However, in many circumstances, it would be desirable for the blade to be advanced both in predetermined increments, for example as successive sections of the blade are detached, 5 but also for the position of blade to be adjusted by a much finer degree, to control the depth of cut.

We have now devised an arrangement which provides both coarse and fine adjustment of the blade position.

According to a second aspect of the present invention, 10 there is provided a cutting tool having a blade and a sliding blade-carriage formed with an elongate projection which extends substantially perpendicularly through a slot formed in the blade, the projection being rotatable about an axis parallel to its longitudinal axis and the slot being of substantially 15 the same diameter as the projection and extending substantially perpendicularly to the axis of movement of the carriage, so that as the projection is rotated, the blade is correspondingly advanced or withdrawn relative to the carriage.

Thus the carriage may be slid to-and-fro to provide 20 coarse adjustment of the blade position and the elongate projection may be rotated to provide fine adjustment of the blade position.

Preferably the blade is provided in a replaceable cartridge to which the blade-carrier is preferably mounted.

25 As mentioned above, it is known to provide a cutting tool with a blade formed with a number of lines of weakness defining successive blade sections.

However, in order to detach successive blade sections from the end of the blade it is typically necessary to press 30 the end of the blade sideways against a hard surface to snap the blade along a line of weakness. The blade must therefore be exposed as the end section is detached and, should the cutting tool slip, injury may result.

We have now devised an arrangement which overcomes this 35 limitation of existing cutting tools.

According to a third aspect of the present invention, there is provided a cutting tool having a passageway for receiving a elongate blade formed with one or more lines of weakness defining successive blade sections, a portion of the

passageway being formed by opposed first and second walls pivotally mounted such that they may be displaced to one side of the passageway to allow an end section of the blade to be introduced into the gap thus formed, and then brought back into line with the passageway to detach the end section from the remainder of the blade.

Thus it is not necessary for the end of the blade to be exposed in order for it to be detached.

Preferably the portion of the passageway formed by the first and second walls is arranged to pivot away from the passageway about the forward edge of the portion.

Preferably, the detached end section of the blade is pressed through an opening into a containment region.

Preferably the passageway is provided in a replaceable blade-cartridge, which may also provide the containment region for receiving spent blade sections.

It is known to provide a cutting tool with a replaceable cartridge from which a blade may be extended and retracted. However, such cartridges present a serious safety hazard where it is possible for the blade of the cartridge to be exposed when the cartridge is outside of the tool.

We have now devised an arrangement which overcomes this problem.

According to a fourth aspect of the present invention, there is provided a cutting tool comprising a replaceable blade-cartridge within which a blade is carried such that the blade may be slid from an exposed position to a retracted position and comprising means for preventing the cartridge from being removed from the tool whilst the blade is in its exposed position and means which lock the blade in its retracted position as the cartridge is removed from the tool.

Preferably the tool comprises a blade-carrier and the means for preventing the cartridge from being removed from the tool whilst the blade is in its exposed position comprises a pivoting catch having a first portion which engages a part of the tool body when the blade is in its exposed position, and a second portion which is displaced by the blade-carrier when the blade is in its retracted position to disengage the first portion from said part of the tool body.

Preferably the tool comprises a blade-carrier and the means which lock the blade in its retracted position as the cartridge is removed from the tool comprises a pivoting catch having a first portion which engages the blade-carrier when the blade is in its retracted position and the cartridge is outside of the tool, and a second portion which is displaced by a part of the tool body when the blade is inserted into the tool to disengage the first portion from the blade-carrier.

The arrangement thus significantly reduces the risk of the blade being exposed when the cartridge is outside of the tool.

An embodiment of the present invention will now be described by way of an example only and with reference to the accompanying drawings, in which:

Figure 1 is a exploded view of the various parts which form a cutting tool in accordance with the present invention; Figure 2 is a view of a partially assembled cutting tool;

Figure 3 is a side elevation of a partially assembled cutting tool;

Figure 4 is a view of a blade-cartridge in accordance with the present invention; and

Figure 5 is a series of sectional plan views showing the sequence of operations for detaching a blade section.

Referring to Figures 1 to 3 of the drawings, a cutting tool is shown to comprise a pair of opposed cover plates 2,4, which when brought together provide a handle for the device.

Projections 6,8 formed on the inner surface of each of the cover plates 2,4 provide a passageway 10 which extends longitudinally through the handle for receiving a replaceable blade-cartridge 12, which may be slid into the passageway 10 via an opening 14 formed between the cover plates 2,4 at the rear of the handle.

A blade 16 is contained within the cartridge 12 in a passageway 18 which is closed at its rear end but is formed with an opening 20 at its forward end, through which a limited portion of the blade 16 may be extended, so that, when the cartridge 12 is inserted into the handle, the extended portion will project through an opening 22 at the forward end of the

handle.

A guard member 24 is arranged to be pivotally mounted at the forward end of the handle to conceal the extended blade portion of a cartridge 12 inserted into the handle.

- 5 The guard member 24 is formed with a pair of resilient arms 26,28 which, in the assembled device, extend rearwardly into the handle and bear upon the base wall 30 of the handle to bias the guard member 24 such that a portion 32 of the guard member normally projects through the opening 22 at the forward
10 end of the handle, but may be displaced into the handle by pressing the guard member 24 against a workpiece.

- An strut 34 is pivotally joined by a thin membrane 36 to the top of the guard member 24 and is bifurcated to provide a pair of resilient arms 38,40, each of which is formed at its
15 distal end with a respective lug 42,44. The lugs 42,44 are positioned to locate within respective profiled recesses 46 formed in the inner surfaces of the opposed cover plates 2,4.

- A guide-channel 48 at the forward end of each profiled recess 46 decreases in depth both upwardly and downwardly away
20 from its midpoint, thereby forming a trough into which a lug 42,44 is normally biased by its respective arm 38,40. In this position, a buttress 50, to the rear of each lug 42,44, prevents the projecting portion 32 of the guard member 24 from being displaced into the handle.

- 25 A pair of triggers for releasing the guard member are provided in the form of respective tongues 52,54 formed in the two cover plates 2,4. By providing triggers on the opposite sides of the handle, the tool may be operated by either left or right-handed persons.

- 30 Each tongue 52,54 is formed on its inner surface with a projection 56, which aligns with a corresponding tapered projection 58,60 formed on a respective side of the strut 34. Thus, by pressing upon either of the tongues 52,54, the strut 34 may be deflected upwards to release the guard member 24.

- 35 With the lugs 42,44 clear of their respective buttresses 50 the projecting portion 32 of the guard member 24 may be displaced into the handle by pressing the guard member 24 against a workpiece.

By displacing the projecting portion 32 of the guard

member 24 into the handle, the lugs 42,44 are driven backwards along upper guide-channels 62 of their respective recesses 46. The depth of each recess 46 increases towards the rear of its upper guide-channel 62, across a region 64. An abrupt increase
5 in the depth of each recess 46 at the lower edge 66 of the region 64 defines a lower guide-channel 68 into which the lugs 42,44 are driven by the recoil action of the resilient arms 38,40.

The abrupt increase in the depth of each recess 46
10 between its upper and lower guide-channels 62,68 ensures one-way travel of the lugs 42,44 around the circuits formed by their respective guide-channels 48,62,68.

As the guard member 24 is released from the workpiece and pivots forwards under the recoil action of the arms 26,28,
15 the lugs 42,44 are drawn forwards along the lower guide-channels 68 of their respective recesses 46. A gradual decrease, followed by an abrupt increase in the depth of each recess 46, towards the forward end of its lower guide-channel 68, ensures that, when the guard member 24 is fully re-
20 deployed, the lugs 42,44 are prevented from returning along the lower guide-channels 68 of their respective recesses 46. The guard member 24 is thus locked in place regardless of whether pressure on the tongues 52,54 has been released.

If pressure is maintained on one or both of the tongues
25 52,54, whilst the tool is removed from a workpiece, then as that pressure is released, the lugs 42,44 slide upwards into the troughs formed in the guide-channels 48 at the forward ends of their respective recesses 46, under the recoil action of the resilient arms 38,40.

A carriage 70 is mounted to one side of the cartridge
12 by means of a retaining portion (not shown) which locates within the passageway 18. The carriage 70 is provided with a rotatable cylindrical core 72 from which an eccentric axial projection 74 extends across the passageway 18 and though a
35 slot 76 formed in the blade 16. The slot 76 is of substantially the same diameter as the axial projection 74 and extends substantially perpendicularly to the axis of movement of the blade 16, so that as the cylindrical core 72 of the carriage 70 is rotated, the blade 16 is correspondingly advanced or

withdrawn by a small distance relative to the carriage 70.

The carriage 70 comprises a resilient portion 78 which, when the cartridge 12 is inserted into the handle, biases a catch 80 into engagement with a corresponding pawl 82 formed
5 in the inner surface of the cover plate 4. A button 84 extends through an elongate slot 86 formed along one side of the cover plate 4 to allow the carriage 70 to be slid backwards and forwards along the cartridge 12 to move the blade 16.

The catch 80 and the opposed indentations which form
10 the pawl 82 are shaped to provide a ratchet action which requires the button 84 to be pressed inwards to allow the blade 16 to be withdrawn into the cartridge 12.

The blade 12 is formed with a number of lines of weakness 88 which define successive blade sections 90, and the
15 cartridge 12 of the present invention provides a convenient means for detaching a blunted section from the forward end of the blade 16 to expose a fresh blade section.

As shown in Figure 4, with the cartridge 12 removed from the handle and with the blade 16 withdrawn, a portion 92
20 of the passageway 18 formed by opposed walls 94 and 96 may be pivoted outwards from the cartridge 12 to provide a gap 98. The displacement of the wall 94 also forms an opening 100 leading to a compartment 102 in the rear of the cartridge 12.

By advancing the blade 16 into the gap 98, as shown in
25 Figure 5a, so that its end section 104 overlies the opening 100 and then pressing the displaced portion 92 of the cartridge 12 back into its normal position, as shown in Figures 5b and 5c, the end section 104 is detached from the remainder of the blade by the wall 94, with the spent section 104 being pressed
30 through the opening 100 and into the compartment 102. The remainder of the blade 16 may then be re-introduced between the walls 94 and 96, as shown in Figure 5d.

Barbs 106 formed on the interior wall of the compartment 102 serve to hold spent blade sections away from
35 the opening 100.

The cartridge 12 is further provided with a pair of pivoting safety catches 108,110. The rearmost catch 110 comprises a downwardly projecting portion 112, which is deflected upwards by the retaining portion of the carriage 70,

when the carriage 70 is fully retracted, to retract an upwardly projecting portion 114 of the catch. A recess 16 is formed in the cover plate 4 into which the upwardly projecting portion 114 may extend, when the cartridge 12 is inserted into the
5 handle and the carriage 70 is slid forwards, so that there is no possibility of the cartridge 12 being removed from the handle whilst the blade 16 is exposed.

The foremost catch 108 comprises a downwardly projecting portion 118 which, when the cartridge 12 is removed
10 from the handle acts as a stop against which the retaining portion of the carriage 70 abuts, to prevent the carriage 70 from sliding forwards to expose the blade 16. The catch 108 also comprises and an upwardly projecting portion 120 which, when the cartridge 12 is inserted into the handle, is depressed
15 by a corresponding projection 122 formed in the cover plate 4, thereby raising the downwardly projecting portion 118 of the catch to allow the carriage 70 to slide along the cartridge 12.

The cutting tool thus described comprises a number of features which make it significantly safer to use than existing
20 tools.

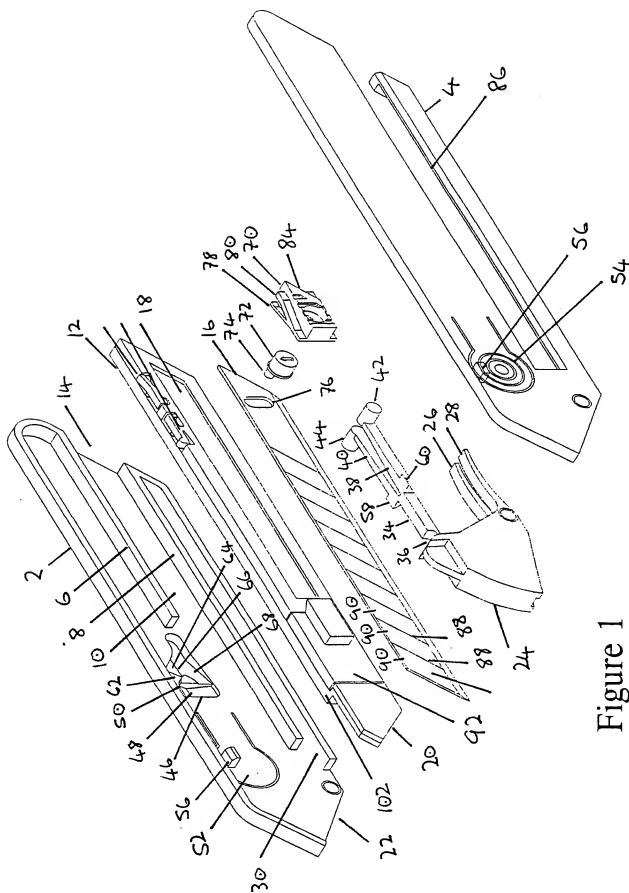


Figure 1

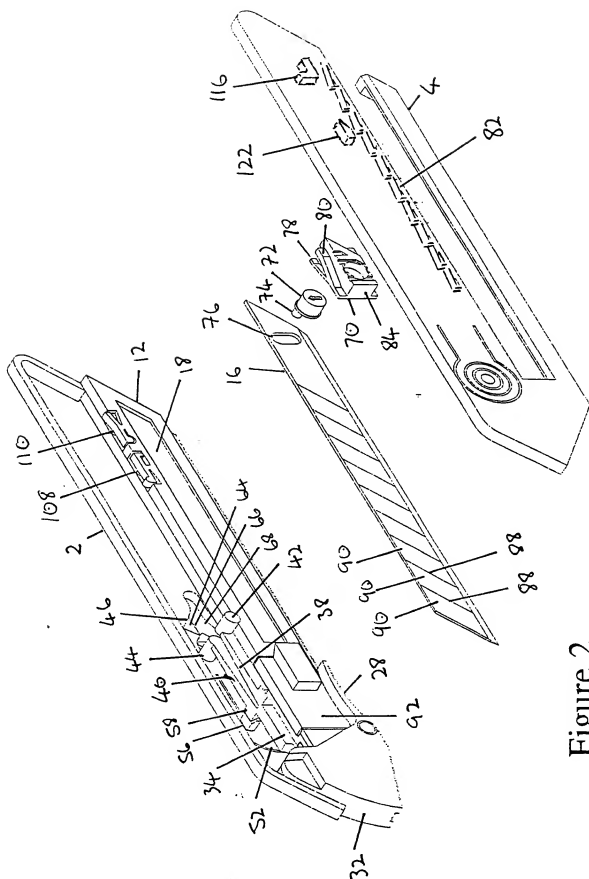


Figure 2

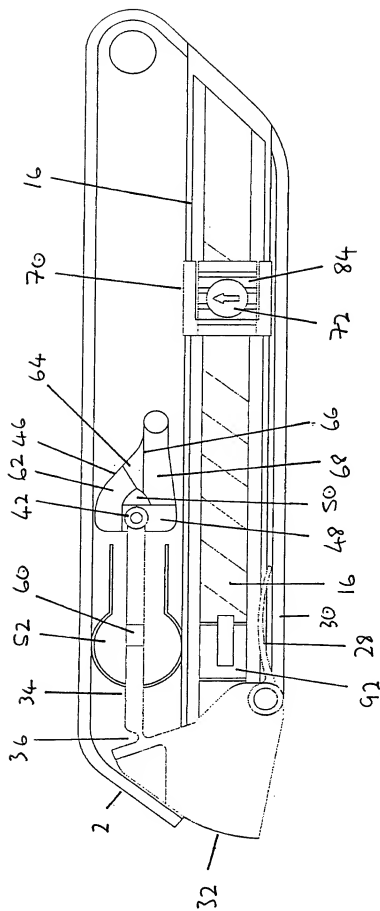


Figure 3

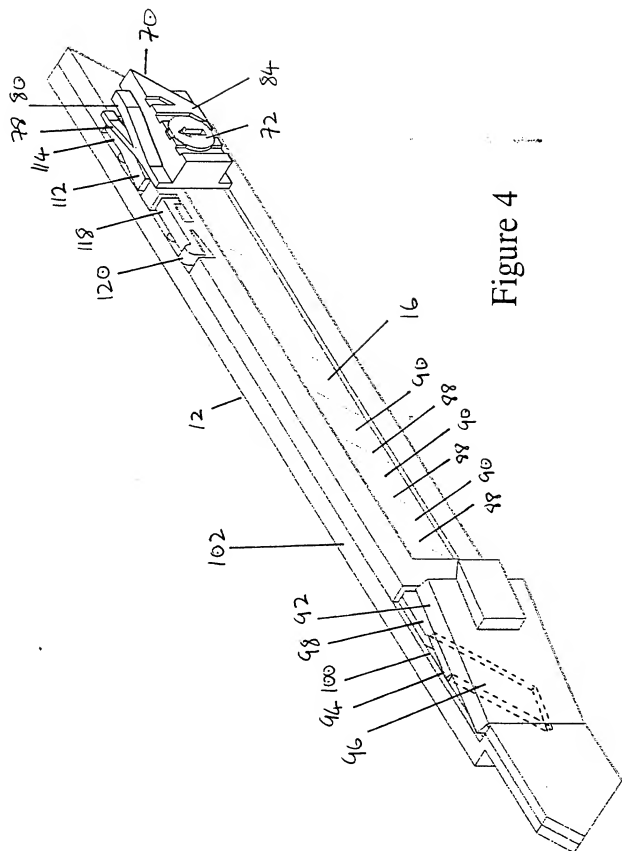


Figure 4

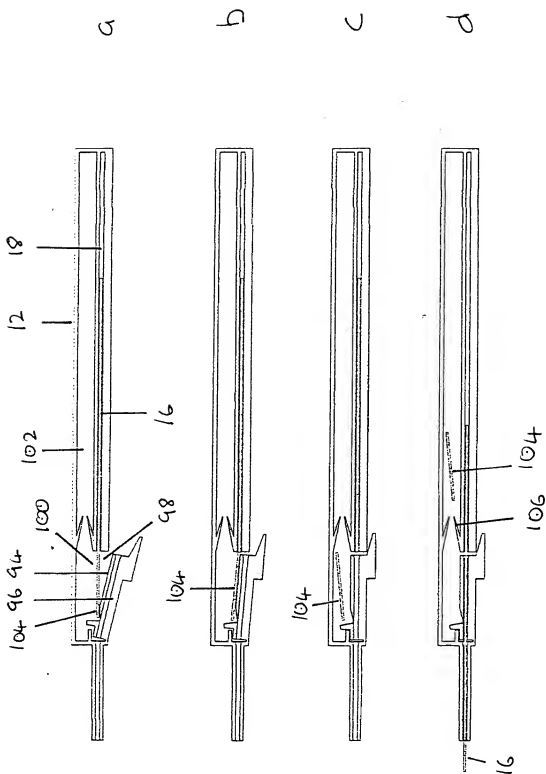


Figure 5